



山东汇亿莱国际贸易有限公司

SHANDONG HUIYILAI INTERNATIONAL TRADE CO., LTD.

地址：山东省诸城市密州东路85号

Add: ZHUCHENG E - COMMERCE BUSINESS PARK , NO .85, MIZHOU EAST ROAD ,
MIZHOU SUB - DISTRICT , ZHUCHENG CITY , WEIFANG CITY ,
SHANDONG PROVINCE CHINA

Tel:19577765737

Web: www.huiyilai.com

E-mail: melodyguo@huiyilaieport.com

股份/方/品牌 0536-6188961

SHANDONG HUIYILAI INTERNATIONAL TRADE CO., LTD.

Professional supplier of vacuum
packaging machinery

真空包装机械专业供应商



+86 195 7776 5737
[HTTP://www.huiyilai.com](http://www.huiyilai.com)

E-mail:
melodyguo@huiyilaieport.com



BRIEF INTRODUCTION

山东汇亿莱国际贸易有限公司成立于2023年，是一家集生产加工、销售、贸易为一体的民营企业。公司坐落于被誉为中国“恐龙之乡”的诸城市，是山东半岛南部沿海开放城市之一。毗邻青岛经济技术开发区，东距青岛港100公里，南距日照港70公里，地理位置优越，交通运输便捷。为我们在安排运输和争取优势价格方面带来了很大的便利。我们相信质量、服务和价格是我们高效工作的有力保证。

我公司专业从事果蔬及肉类清洗及加工设备；巴氏杀菌设备；盒式气调真空包装机；连续式滚动包装机；贴体包装机；全自动拉伸膜真空包装机及其它食品相关设备等的开发，设计、制造及国内外销售。

公司以国际贸易为主导，在不间断的国际贸易活动中，我们对产品以及市场的发展有了充分的认识。利用我们自身丰富的经验，我们与世界各地的客户建立了良好的合作关系。我们的主要市场是北美洲、大洋洲、日本、韩国、中东以及中亚等地区。

我们的宗旨是：“用服务与真诚来换取你的信任与支持，互惠互利，共创双赢！”

我公司愿与国内外各界同仁志士竭诚合作，共创未来！

Shandong Huiyilai International Trade Co., Ltd. was founded in 2023, is a collection of production and processing, sales, trade as one of the private enterprises. The company is located in Zhucheng City, which is known as the "Hometown of Dinosaurs" in China, and is one of the open coastal cities in the south of Shandong Peninsula. Adjacent to Qingdao Economic and Technological Development Zone, 100 kilometres from Qingdao Port in the east and 70 kilometres from Rizhao Port in the south, the company has a superior geographical position and convenient transportation. It brings us great convenience in arranging transport and getting advantageous price. We believe that quality, service and price are the strong guarantee for our efficient work.

Our company specializes in the development, design, manufacture and domestic and international sales of all kinds of fruit, vegetable and meat cleaning and processing equipment; pasteurization equipment; box-type air-conditioned vacuum packaging machine; continuous rolling packaging machine; sticker packaging machine; automatic stretch film vacuum packaging machine and other food related equipment and so on.

Our company is dominated by international trade, and in the uninterrupted international trade activities, we have a full understanding of the products as well as the development of the market. Utilising our own rich experience, we have established good relationships with customers all over the world. Our main markets are North America, Oceania, Japan, Korea, the Middle East and Central Asia and so on.

Our tenet is: "Exchange your trust and support with service and sincerity, mutual benefit and create a win-win situation!"

Our company is willing to cooperate with domestic and foreign colleagues from all walks of life to create a better future!


DZR 620T

Large Intelligent Manipulator Stretch Packaging Machine

大型智能机械手拉伸包装机

PERFORMANCE BENEFITS 性能优点

- | | |
|--|-----------------|
| 1. AF automatic feeding auxiliary system | 1. AF自动投料辅助系统 |
| 2. Automatic quantitative canning system | 2. 自动定量罐装系统 |
| 3. Intelligent computer control system | 3. 智能电脑控制系统 |
| 4. Three color sensor tracking imported from the United States | 4. 美国进口三色传感跟踪 |
| 5. Siemens three proof electrical cabinet | 5. 西门子三防电器柜 |
| 6. Automatic laser ink jet printing | 6. 全自动激光油墨喷码 |
| 7. Aviation grade customized high strength alloy body | 7. 航空级定制高强度合金主体 |
| 8. Computer fault intelligent processing system | 8. 电脑故障智能处理系统 |
| 9. Tiger type customized fine steel chain | 9. 虎式定制精钢链条 |
| 10. Customized Swiss wear resistant linear bearing | 10. 定制瑞士耐磨直线轴承 |
| 11. Siemens drive positioning | 11. 德国西门子传动定位 |
| 12. German original vacuum system | 12. 德国原装真空系统 |

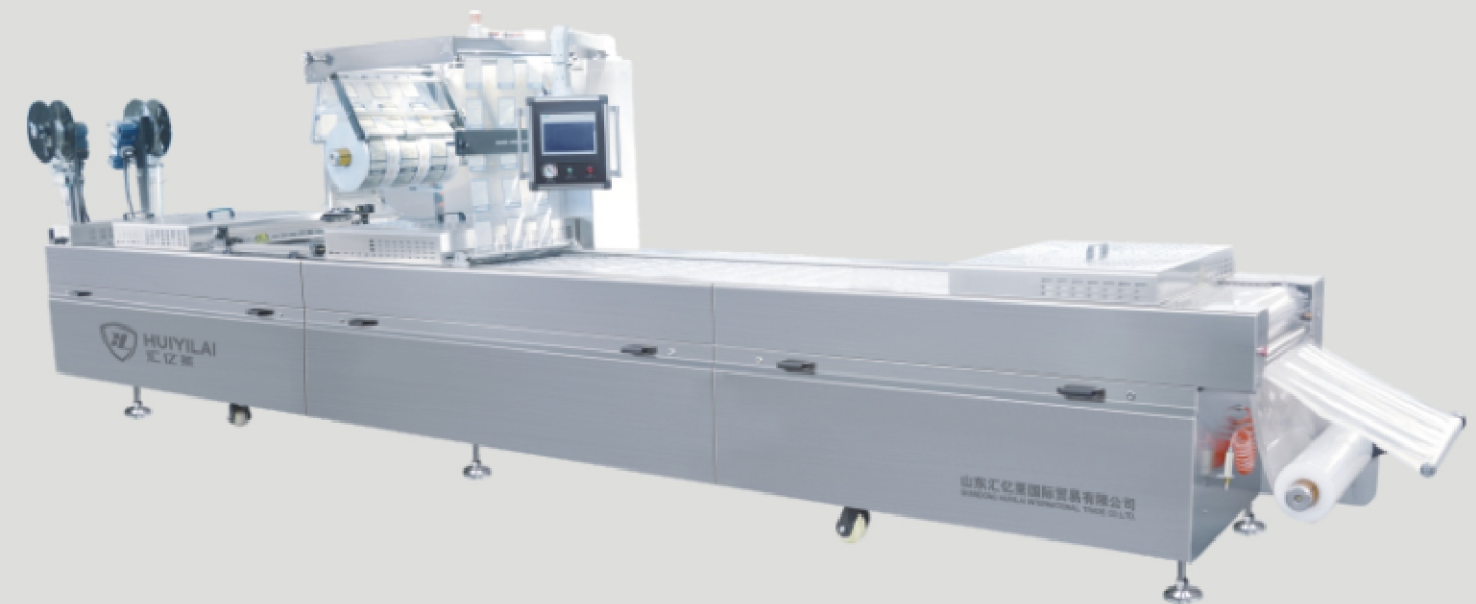

TECHNICAL PARAMETER 技术参数

Upper film width: 593-596mm, bottom film width: 622-624mm,
vacuum degree: $\leq 200\text{Pa}$, power supply: 380V/50Hz/13Kw

• 上膜宽度: 593-596mm • 底膜宽度: 622-624mm • 真空度: $\leq 200\text{Pa}$ • 电源功率: 380V/50Hz/13Kw

DZR 520H

Advanced Intelligent Stretch Packaging Machine

大步进智能拉伸包装机

PERFORMANCE BENEFITS 性能优点

- | | |
|--|-----------------|
| 1. Intelligent computer control system | 1. 智能电脑控制系统 |
| 2. Three color sensor tracking imported from the United States | 2. 美国进口三色传感跟踪 |
| 3. Fault sound and light alarm | 3. 故障声光报警 |
| 4. Automatic positioning of upper membrane | 4. 上膜自动定位稳定 |
| 5. Siemens three proof electrical cabinet | 5. 西门子三防电器柜 |
| 6. Automatic laser ink jet printing | 6. 全自动激光油墨喷码 |
| 7. Aviation grade customized high strength alloy body | 7. 航空级定制高强度合金主体 |
| 8. Computer fault intelligent processing system | 8. 电脑故障智能处理系统 |
| 9. Tiger type customized fine steel chain | 9. 虎式定制精钢链条 |
| 10. Siemens drive positioning | 10. 德国西门子传动定位 |
| 11. German original vacuum system | 11. 德国原装真空系统 |



TECHNICAL PARAMETER 技术参数

Upper film width: 493-496mm, bottom film width: 522-524mm,
vacuum degree: $\leq 200\text{Pa}$, power supply: 380V/50Hz/12Kw

• 上膜宽度: 493-496mm • 底膜宽度: 522-524mm • 真空度: $\leq 200\text{Pa}$ • 电源功率: 380V/50Hz/12Kw

DZR 520T

Double Side High Configuration Intelligent Stretch Packaging Machine

双面高配智能拉伸包装机

PERFORMANCE BENEFITS 性能优点

1. Stable automatic positioning of lower membrane
2. Two way blow pull forming system
3. AF automatic feeding auxiliary system
4. Automatic quantitative canning system
5. Intelligent computer control system
6. Suction film forming
7. Us tricolor sensor tracking
8. Fault sound and light alarm
9. Enhanced signal transmission system
10. KF Butler assistant system
11. The automatic positioning of the film is stable
12. Heating system in negative pressure area
13. Siemens three proof electrical cabinet
14. Automatic laser ink jet printing
15. Siemens multi direction punching
16. High strength alloy
17. Tiger type customized fine steel chain
18. Disc variable speed cutting
19. Soft variable speed conveying
20. Hexagonal balance
21. Independent high speed crosscutting
22. Swiss wear resistant linear bearing
23. Siemens drive positioning
24. Computer adjustable vacuum system
25. SUS316 food grade guard
26. German original vacuum system
27. High speed lifting system
28. Fault intelligent processing system
1. 下膜自动定位稳定
2. 双向吹拉成型系统
3. AF自动投料辅助系统
4. 自动定量罐装系统
5. 智能电脑控制系统
6. 吸入式上膜成型
7. 美国进口三色传感跟踪
8. 故障声光报警
9. 增强信号发射系统
10. KF达管家辅助系统
11. 上膜自动定位稳定
12. 负压区域加热系统
13. 西门子三防电器柜
14. 全自动激光油墨喷码
15. 德国西门子多功能多向冲切
16. 航空级定制高强度合金主体
17. 虎式定制精钢链条
18. 盘式变速切割
19. 软质调速输送
20. 六角平衡
21. 独立高速横切
22. 定制瑞士耐磨直线轴承
23. 德国西门子传动定位
24. 电脑可调真空系统
25. SUS316食品级护板
26. 德国原装真空系统
27. 四驱高速升降系统
28. 电脑故障智能处理系统



TECHNICAL PARAMETER 技术参数

Upper film width: 493-496mm, bottom film width: 522-524mm,
vacuum degree: $\leq 200\text{Pa}$, power supply: 380V/50Hz/13Kw

• 上膜宽度: 493-496mm • 底膜宽度: 522-524mm • 真空度: $\leq 200\text{Pa}$ • 电源功率: 380V/50Hz/13Kw


DZR 420H

High Configuration Intelligent Stretch Packaging Machine

高配智能拉伸包装机

PERFORMANCE BENEFITS 性能优点

- | | |
|---|-----------------|
| 1. Intelligent computer control system | 1. 智能电脑控制系统 |
| 2. Three color sensor tracking imported from USA | 2. 美国进口三色传感跟踪 |
| 3. Fault sound and light alarm | 3. 故障声光报警 |
| 4. The automatic positioning of the film is stable | 4. 上膜自动定位稳定 |
| 5. Siemens three proof electrical cabinet | 5. 西门子三防电器柜 |
| 6. Automatic laser ink jet printing | 6. 全自动激光油墨喷码 |
| 7. Aviation grade customized high strength alloy body | 7. 航空级定制高强度合金主体 |
| 8. Computer fault intelligent processing system | 8. 电脑故障智能处理系统 |
| 9. Tiger type customized fine steel chain | 9. 虎式定制精钢链条 |
| 10. Siemens drive positioning | 10. 德国西门子传动定位 |
| 11. German original vacuum system | 11. 德国原装真空系统 |

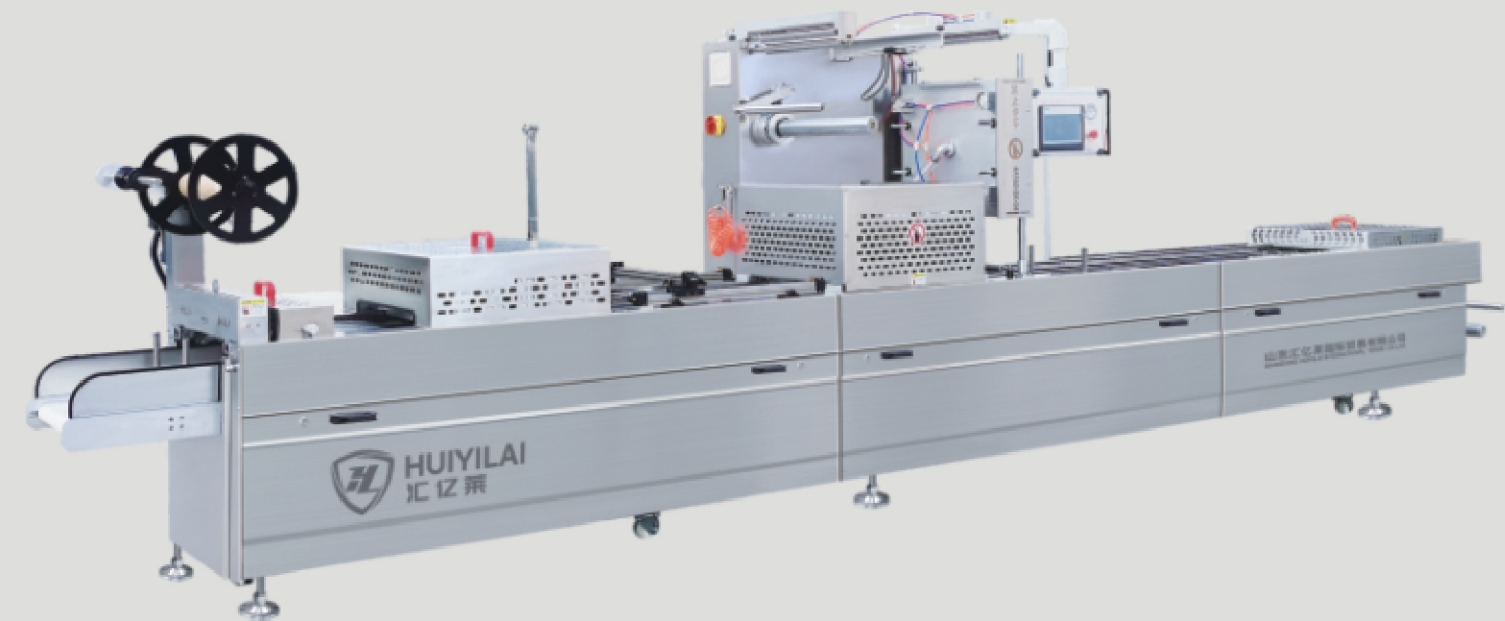

TECHNICAL PARAMETER 技术参数

Upper film width: 393-396mm, bottom film width: 422-424mm,
vacuum degree: $\leq 200\text{Pa}$, power supply: 380V/50Hz/11Kw

• 上膜宽度: 393-396mm • 底膜宽度: 422-424mm • 真空度: $\leq 200\text{Pa}$ • 电源功率: 380V/50Hz/11Kw

Fully Automatic Pillow Packaging Machine

全自动枕式包装机

PERFORMANCE BENEFITS 性能优点

1. Dual frequency conversion simple mechanical structure, easy to maintain, less wear and tear, and long service life.
 2. The main control circuit adopts the PLC developed by our company, with touch screen display and frequency converter control. It has a good human-machine interface, and the operation is centralized, intuitive, and convenient.
 3. The packaging speed and bag length are controlled by dual frequency converters, with stepless speed change and wide adjustment range, which can perfectly match the previous process of the production line.
 4. High sensitivity electric eye automatic aiming and tracking.
 5. Each sealing temperature is independently controlled, suitable for various packaging materials, and the sealing is beautiful and firm.
 6. Intermittent inflation devices and alcohol spraying devices can be installed.
1. 双变频机械结构简单，维修方便，磨损少，使用寿命长。
2. 主控制电路采用我公司开发的PLC，触摸屏显示，变频器控制。具有良好的人机界面，操作集中、直观、方便。
3. 包装速度和步长均采用双变频器控制，无级变速，调节范围广，可与生产线前道工序完美匹配。
4. 高灵敏度电子扫描和跟踪。
5. 各密封温度独立控制，适用于各种包装材料，密封美观牢固。
6. 可安装间歇充气装置。

SCOPE OF APPLICATION 适用范围

Suitable for instant noodles, round cakes, cookies, snow cakes, bread, moon cakes, egg yolk pie, daily necessities, stationery, hardware, medical and other regular packaging with strong hardness.

适用于方便面、圆饼、饼干、雪饼、面包、月饼、蛋黄派、日用品、文具、五金、医疗等硬度强的常规包装。



Pillow packaging machine is a new type of automatic continuous shrinkage packaging equipment, which adopts an ordinary electric furnace wire heating mode, which is characterized by fast warming up, good stability, low maintenance cost, stable and adjustable shrinkage temperature and motor transmission speed, and wide adjustment range; Unique drum rotation device, which can work continuously.

枕式包装机是一种新型的自动连续收缩包装设备，采用普通电炉线材加热方式，具有升温快、稳定性好、维护成本低、收缩温度和电机传动速度稳定可调、调节范围广等特点；独特的滚筒旋转装置，可连续工作。



DZ 1100

Computer Continuous Rolling Packaging Machine


电脑连续滚动包装机

PERFORMANCE BENEFITS

性能优点

1. Adopt 3042B food grade stainless steel plate
2. Using German vacuum pump, the pumping rate is 200 m³/h, stable performance, and effectively reduce noise and air pollution
3. Waterproof computer Chinese character control system is adopted to reach the international advanced level
4. The brake angle foot is used to ensure the stability of the equipment
5. Silica gel sealing material is adopted to ensure high sealing performance and durability
6. PVC high-quality soft bottom track and aluminum alloy fixation are adopted to ensure that the packaging bag is not scratched
7. Equipped with emergency stop button
8. The transmission system adopts the latest faulkson technology

1. 采用3042B食品级不锈钢板
2. 采用德国真空泵，抽气速率为200立方米/小时，性能稳定，且有效的减少了噪音及空气污染
3. 采用防水电脑汉字控制系统，达到国际先进水平
4. 采用可刹车角脚，保证了设备的稳定性
5. 采用硅胶密封材质，保证了高密封性及耐用性
6. 采用PVC优质软底履带及铝合金固定，保证了包装袋不受划伤
7. 配有整机急停按钮
8. 传动系统采用最新式福克森技术

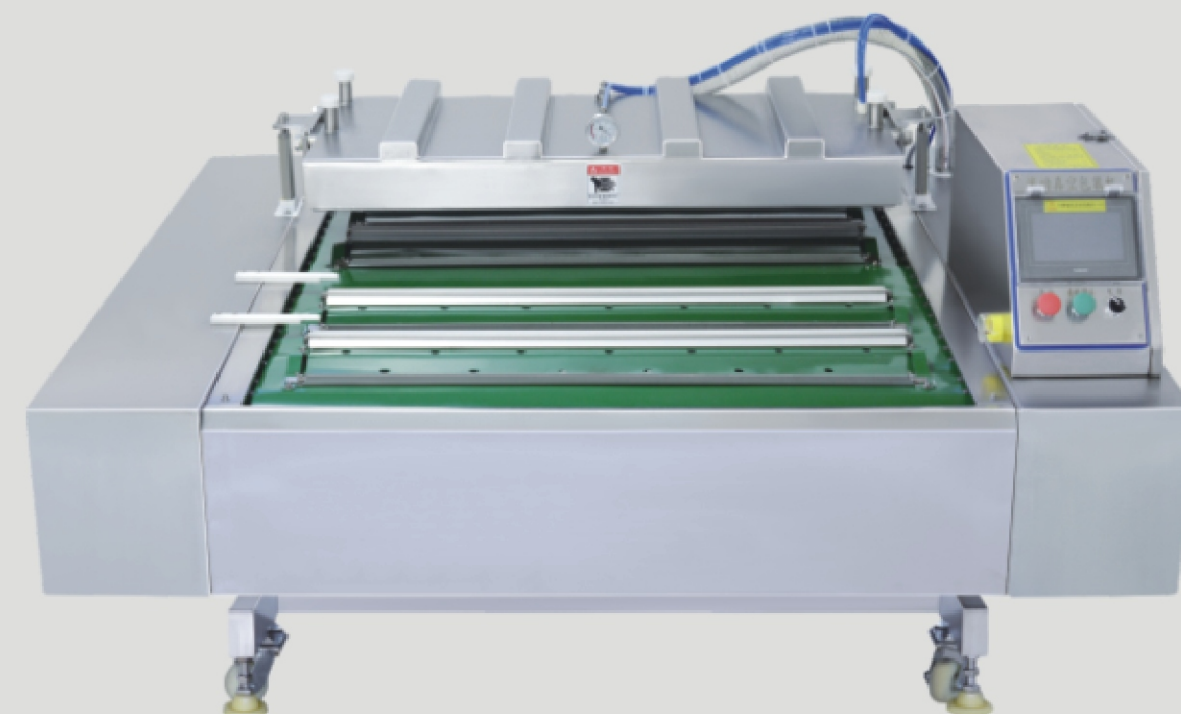

TECHNICAL PARAMETER

技术参数

External dimensions: 1900 × one thousand three hundred and sixty × 1050mm
vacuum chamber size: 1250 × four hundred and fifty × 105mm sealing size: 1100 × 10mm
Maximum length of packaging bag/maximum height of packaging material: 350/90mm
Working rate: 3-5 times/minute Power supply: 380V/50Hz Total power: about 6Kw

- 外形尺寸: 1900×1360×1050mm • 真空室尺寸: 1250×450×105mm • 封口尺寸: 1100×10mm
- 包装袋最大长度/包装物最大高度: 350/90mm • 工作速率: 3-5次/分钟 • 电源: 380V/50Hz • 总功率: 约6Kw

Box Type Modified Atmosphere Vacuum Packaging Machine

盒式气调真空包装机

PERFORMANCE BENEFITS 性能优点

1. Box type vacuum packaging machine is a special semi-automatic vacuum packaging machine customized according to customer requirements
 2. The cabinet and cover are made of imported SUS304 food grade stainless steel
 3. The surface is wrapped with 1.2mm 304 stainless steel
 4. Waterproof computer board control
 5. The mold and heating plate are made of high strength aluminum magnesium alloy
 6. The pneumatic system adopts Taiwan Yadeke, and the electrical system adopts Chint
 7. Adopt famous brand vacuum pump
1. 盒式真空包装机是根据客户要求，定做的一种专用半自动真空包装机
 2. 柜体与盖子采用进口SUS304食品级不锈钢
 3. 表面均包裹1.2mm304不锈钢
 4. 防水电脑板控制
 5. 模具和加热板采用高强度铝镁合金制作
 6. 气动系统采用台湾亚德克，电器系统采用正泰
 7. 采用知名品牌真空泵



TECHNICAL PARAMETER 技术参数

型号：盒式包装机
功率：5Kw (380V/50HZ)
卷膜最大宽度：420mm
卷膜最大直径：260mm
真空泵排量：40m³/h
包装速度：3-5次/分钟
工作气压：0.6-0.8
气体置换率：≥99%
配气精度：+1%
设备重量：450kg
设备尺寸：1060 × 1050 × 1700mm

Model: Box packaging machine
Power: 5Kw (380V/50HZ)
Maximum width of roll film: 420mm
Maximum diameter of roll film: 260mm
Vacuum pump displacement: 40m³/h
Packaging speed: 3-5 times/minute
Working air pressure: 0.6-0.8
Gas replacement rate: ≥ 99%
Gas distribution accuracy: +1%
Equipment weight: 450kg
Equipment size: 1060 × 1050 × 1700mm



DZ 2S 800 700 600 Vacuum Packaging Machine 真空包装机

PERFORMANCE BENEFITS 性能优点

1. The vacuum pump is imported from Germany or domestic brand
2. The heating device is equipped with German heating strip
3. Time controller computer waterproof
4. The circuit protection switch of packing machine is integral type
5. All stainless steel frame, stainless steel model 3042B
6. The automatic swing head cylinder adopts the brand of Yadeke in Taiwan
7. The material of vacuum tube is imported silicone tube, and its service life is greatly improved
8. Power supply: 380V / 50Hz

- 1.抽气真空泵采用德国原装进口或国内品牌真空泵
- 2.加热装置配德国加热条
- 3.时间控制器电脑防水
- 4.包装机电路保护开关为整体式
- 5.全不锈钢架体，不锈钢型号为3042B
- 6.全自动摆盖气缸采用台湾亚德克品牌
- 7.真空管材质为进口硅胶管，使用寿命大大提高
- 8.电源：380V/50Hz

DZ 4S Four Seals And Customized Nitrogen Filled Concave Vacuum Packaging Machine 四封条及定制充氮下凹式真空包装机

PERFORMANCE BENEFITS 性能优点

1. The vacuum pump is imported from Germany or domestic brand
2. The heating device is equipped with German heating strip
3. Time controller computer waterproof
4. The circuit protection switch of packing machine is integral type
5. All stainless steel frame, stainless steel model 3042B
6. The automatic swing head cylinder adopts the brand of Yadeke in Taiwan
7. The material of vacuum tube is imported silicone tube, and its service life is greatly improved
8. Power supply: 380V / 50Hz

1. 抽气真空泵采用德国原装进口或国内品牌真空泵
2. 加热装置配德国加热条
3. 时间控制器电脑防水
4. 包装机电路保护开关为整体式
5. 全不锈钢架体，不锈钢型号为3042B
6. 全自动摆盖气缸采用台湾亚德克品牌
7. 真空管材质为进口硅胶管，使用寿命大大提高
8. 电源：380V/50Hz



Desktop Vacuum Packaging Machine 贴体真空包装机

Vacuum chamber size (mm) : 700×500×60
Power supply: 380V
Efficacy: 2~3/min
Power (Kw) : 6
真空室尺寸 (mm) : 700×500×60
电源: 380V
功效: 2~3次/分钟
总功率 (kw) : 6

